


Microfono Neck UHF TY.MN100

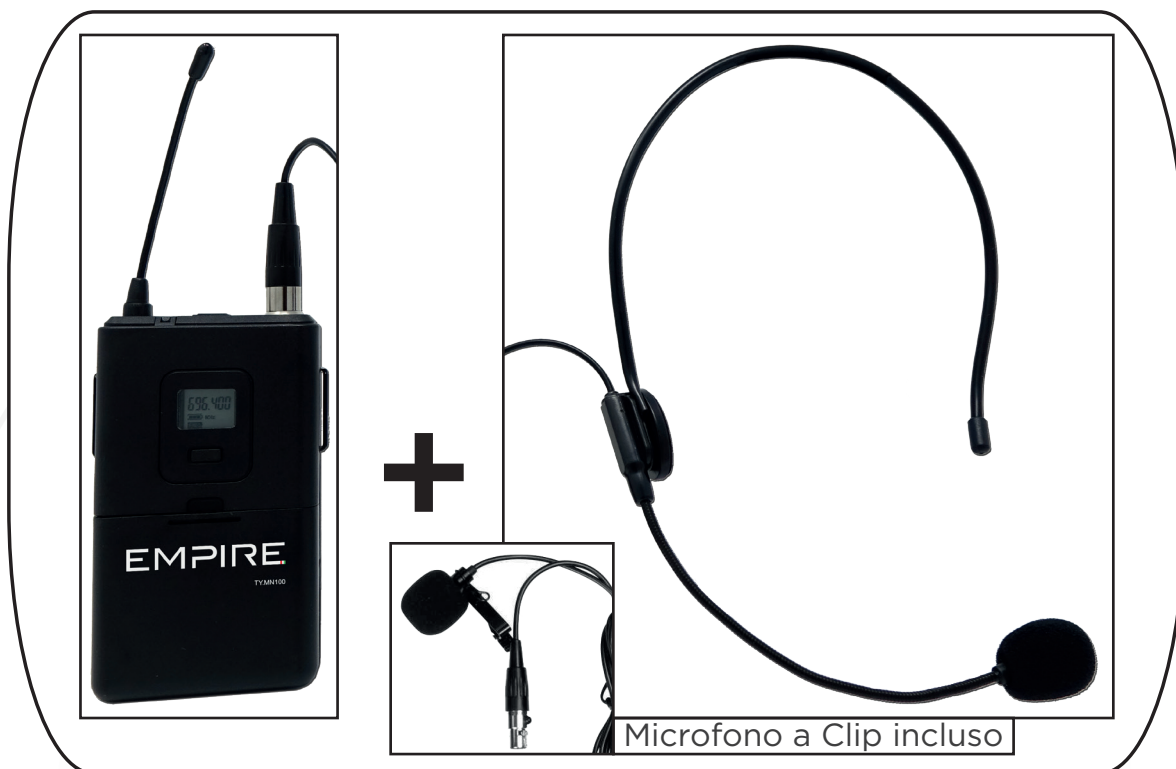

Microfono a Clip incluso

Da abbinare con estrema semplicità ai ricevitori Empire R20 e Empire R40 della Modular Voice Pro Line.

E' possibile abbinarlo anche ai un sistemi microfonici portatili JN100 e JI100 in quanto sono dotati di due canali di ricezione.

Il trasmettitore presenta uno speciale switch per impostare la potenza di trasmissione su due valori: **Low e High.**

High è necessaria in caso di utilizzo all'aperto, se è necessaria una distanza di ricezione fino a 100m ma aumenta il consumo delle batterie.

Low è sufficiente nella maggior parte dei casi in situazioni indoor, dove le distanze sono entro i 30m, e il consumo delle batterie è nettamente inferiore.



Tasti dedicati per le funzioni On/Off, Volume +/- e Selezione Potenza Segnale Low - High

Specifiche Tecniche

1. Battery : 2x 1.5V (AA) non incluse
2. Normal Working Current: 140 mA
3. Normal operating power: 0.42W
7. Continue Working Time: 3h
8. Carrier Band: UHF640-699 MHz
9. Modulation Mode: PLL Phase-Locked Loop Integrated Control
10. Bandwidth: 60MHz
11. Transmission power: 18 mW (Lo) / 30 mW (Hi)
12. Pickup: Capacitive
13. Sensitivity of pickup: - 38dB32dB
14. Pointing characteristics: Full-directivity
15. Frequency Adjustment: IR Infrared Automation
16. Frequency Response: 30-18 KHz
17. Contact Emission Strength: >7dB